


GIMBAL EMERGENCY LIGHT

The RECESSED-GIMBAL (R-GIM) is designed to be installed within the sheetrock or drop ceiling and blends inconspicuously with other existing recessed lighting fixtures. The GIMBAL mounted lamp permits directional lighting and is adjustable to 45 degrees on two planes. Standard finish is white. Available as complete emergency unit, or as a remote.

FEATURES


- 6 volt, 8 watt halogen lamp standard.
- U.L. approved for use in insulated ceilings.
- Steel housing.
- Electronics and battery are mounted in a removable bracket.
- Sealed maintenance free lead battery.
- Solid state charging circuit.
- 120/277 VAC Input, 60 Hz, 8W.
- 24 hour recharge after 90 min. discharge.
- Automatic brown out protection.
- Low voltage disconnect (LVD) protects battery from deep discharge.
- Short circuit and overload protection on DC output circuit.

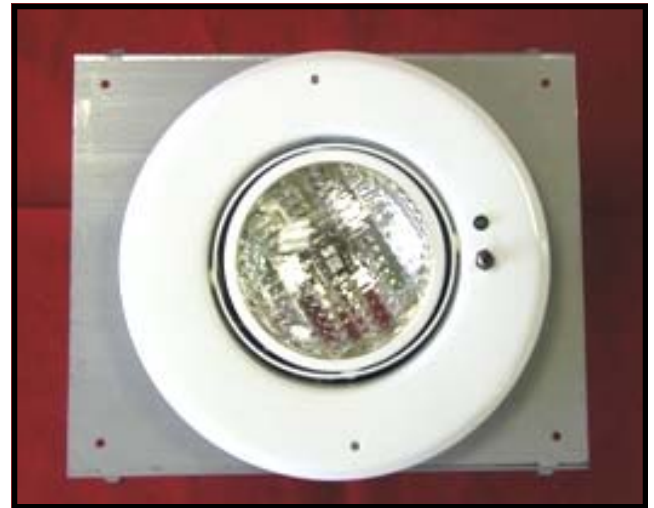

SERIES	COLOR	VOLTAGE	WATTAGE	OPTIONS
R-GIM RECESSED GIMBAL	2 WHITE	6	8	REM REMOTE

Lamp Options

01	6V, 5.4W H.I.T	06	6V, 12W SB
02	6V, 7.2W H.I.T	07	6V, 12W SBH
03	6V, 8W SBH		
04	6V, 9W H.I.T		
05	6V, 9W SB		

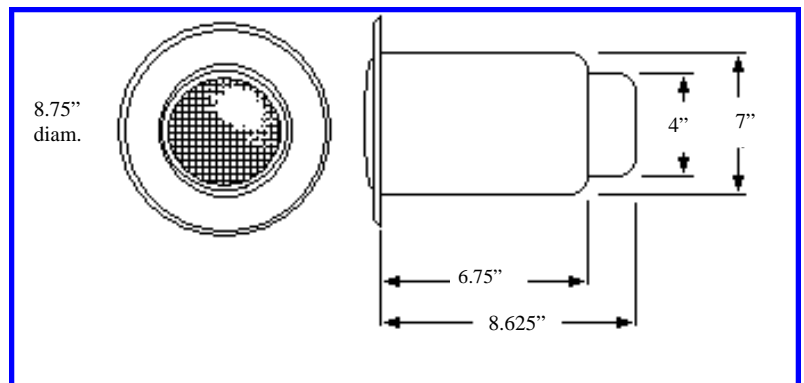

Warranty

The fixture is warranted to be free from defects for 2 years. The battery has a 5 year, prorated warranty.

Agency Approval

Meets the illumination requirement of NFPA Life Safety Code 101, 5-10.2.2.
Certified and tested to standard UL924. UL listed and meets NEC and OSHA codes.

