

# MONARCH

## COMBINATION EXIT SIGN AND EMERGENCY LIGHT

*The Monarch Combination units are economical and energy saving exit signs with two, side mounted emergency lighting heads. The injection molded plastic housing has soft rounded corners for aesthetic appeal. The exit sign's L.E.D. lamps provide a maximum of energy savings potential and the battery pack allows the unit to be self-powered during power outages. There is an option for an additional 11 watts of remote capability.*

### APPLICATION

Suitable for use in almost any commercial or light industrial application. Ideal for mounting in the limited space available above doorways.

### HOUSING

The housing is made of injection molded thermoplastic, making it impact Resistant and corrosion proof. UL 94-5V rated.



### MOUNTING

Easy snap fit canopy can be used for top mounting or knockouts can be used for surface mounting. Included second face allows the unit to be used as a single or double face exit sign. Snap fitting, replaceable chevrons for direction indication.


### LAMPS / HEADS

Long life Light Emitting Diode (L.E.D.) lamps in the exit sign portion provide the maximum in energy savings. The emergency lighting heads contain 6 volt, 5.4 watt, T-5 incandescent lamps. The heads are adjustable within their housing.

SIGN SERIES	LETTER COLOR	LAMP WATTS	LAMP V DC	UNIT COLOR	OPTIONS
MON-COM MONARCH COMBINATION	R RED G GREEN	2 x 5.4	6	All white	RC Remote Capable

### ELECTRICAL/BATTERY

- Dual voltage input 120/277 VAC, 60 Hz.
- Maintenance free, sealed lead calcium battery provides 90 minutes of emergency operation; 6V 4.2 ah with a maximum full recharge time of 48 hours.
- Low voltage disconnect of battery prevents deep discharge and maintains a good battery life.
- Fully automatic, solid state charger.
- Test switch with LED charge indicator / AC voltage indicator
- Line latching feature prevents the unit from turning on during installation to a non-energized AC circuit. Saves labor since the installer does not have to connect the battery terminals once the building is energized.

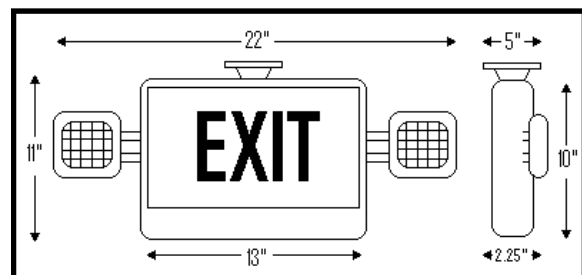

### WARRANTY

The Monarch Series comes from the factory with an unconditional five year warranty on the electronics. The battery comes with a 3-year full, 2-year pro-rata warranty.

### AGENCY APPROVAL

U.L. 924 Listed for damp locations.  
Life Safety NFPA 101.

